

# A1 Microwave

Web: <http://www.A1Microwave.com>

Email: [A1sales@A1Microwave.com](mailto:A1sales@A1Microwave.com)




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

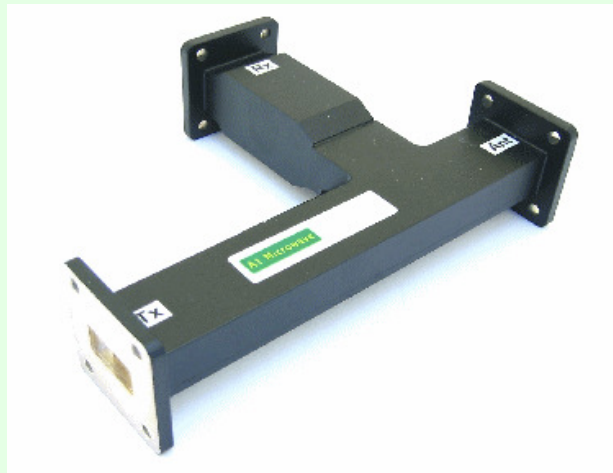

## Ordering information :- Model number **PB1081WA** Ku-band Satcom Diplexer

Designed to connect a transmitter and a receiver to a common antenna port with minimum insertion loss and maximum isolation between the two channels.

Passbands	10.7 to 12.75 GHz and 13.75 to 14.5 GHz
Passband insertion loss	0.25 dB typical RX, 0.25 dB typical TX
Passband return loss	23 dB typical

Rejection:	of transmitter in RX arm	90 dB typical, 80 dB min
	of receiver in TX arm	65 dB typical, 55 dB min

Overall length	149 mm
Flanges	UBR 120

(see web site for alternative connectors, flanges and paint codes)

