

A1 Microwave

Web: <http://www.A1Microwave.com>

Email: A1sales@A1Microwave.com




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

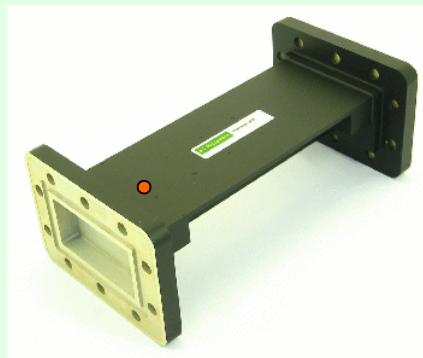

Ordering information :- Model number **PB1559WB-CG/CG-B** C-band Satcom Receiver Protection Filter

Designed to remove interference from radar and other transmitters

Passband	3.6 to 4.2 GHz
Passband insertion loss	0.25 dB typical
Passband return loss	23 dB typical
SMA non directional coupled port	-50 dB coupling value nominal, 1" from flange face, location shown in red
Rejection:	DC to 3.185 GHz 60 dB min
	4.55 to 4.9 GHz 60 dB min
	4.9 to 11 GHz 90 dB min
Overall length	8"
Flanges	CPR 229 G (alternative flanges and coax interfaces available)
Weight	500 grams

Construction Brazed aluminium, not silver plated for ruggedness

Tuning method No tuning screws to be used for ruggedness

