

# A1 Microwave

Web: <http://www.A1Microwave.com>

Email: [A1sales@A1Microwave.com](mailto:A1sales@A1Microwave.com)




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

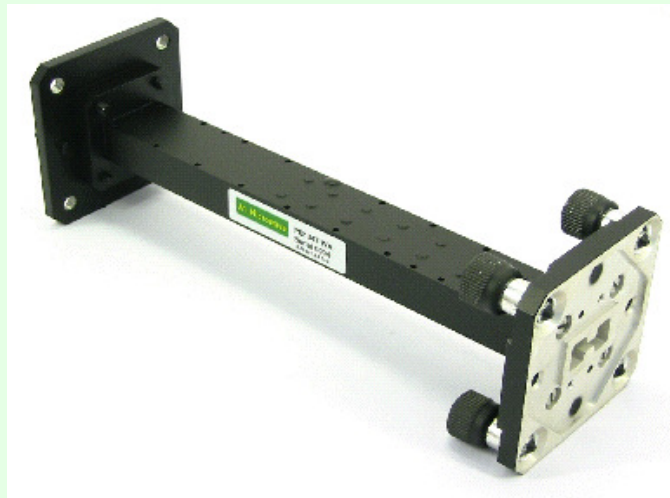

## Ordering information :- Model number **PB1347WA** Ku-band Satcoms transmit Filter

Designed for Ku band satcoms upconverter applications for suppression of broad band noise in the receive band and transmitter harmonics.

Passband	13.75 to 14.5 GHz
Passband insertion loss	0.5 dB typical
Passband return loss	20 dB min
Passband group delay variation	1.0 nS typical

Rejection :	from DC to 12.75 GHz	80 dB min
	From 15.5 to 30 GHz	40 dB min

Flanges WRD 580 QR + UBR 120 (alternatives available)

