

A1 Microwave

Web: <http://www.A1Microwave.com>

Email: A1sales@A1Microwave.com




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

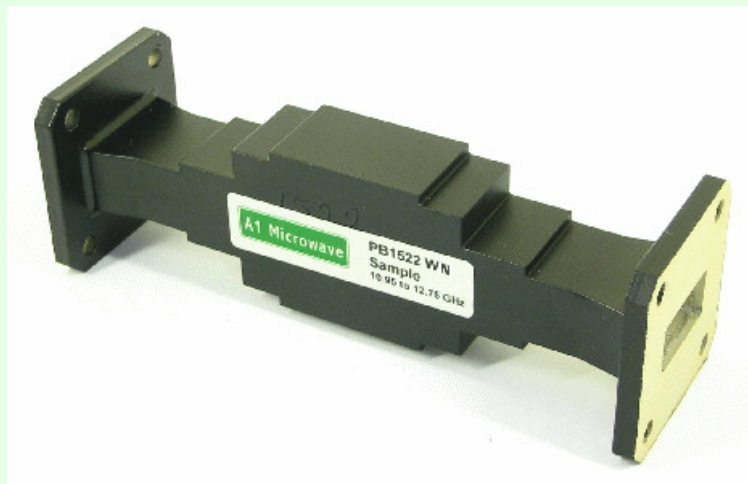

Ordering information :- Model number **PB1522WN-UB/UB-B** Ku-band Satcom receive radar and TX reject filter

Designed for Ku band satcoms to protect receivers from unwanted interference from radars and transmitters

Passband	10.95 to 12.75 GHz	
Passband insertion loss	0.15 dB typical	
Passband return loss	22 db typical, 20 dB min	
Passband group delay variation	0.45 ns typical	
Rejection:	from DC to 9 GHz	95 dB min
	from 9 to 9.5 GHz	75 dB min
	from 9.5 to 10 GHz	50 dB min
	from 13.75 to 14.5 GHz	90 dB min

Overall length 120 mm nominal

Flanges UBR 120 (see web site for alternative flange and paint codes)

