

# A1 Microwave

Web: <http://www.A1Microwave.com>

Email: [A1sales@A1Microwave.com](mailto:A1sales@A1Microwave.com)




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

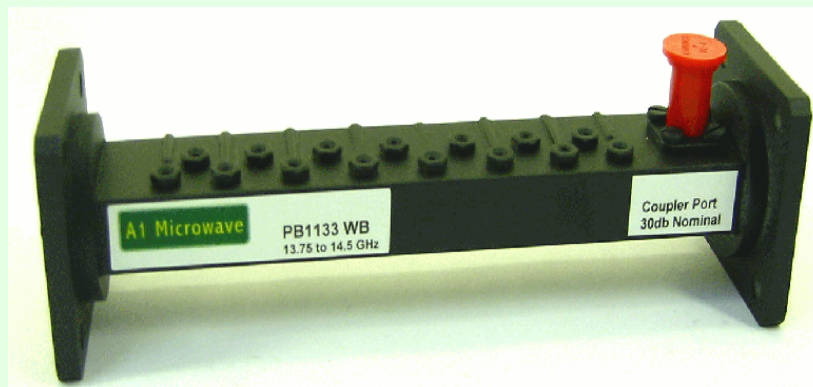

## Ordering information :- Model number **PB1133WB** Ku-band Satcom Transmit Filter

Designed for Ku band satcoms transmitter applications for suppressing LO leakage from the upconverter.

Passband	13.75 to 14.5 GHz
Passband insertion loss	0.18 dB typical
Passband return loss	20 dB min
Passband group delay variation	0.7 ns typical
Rejection:	
from DC to 12.75 GHz	80 dB min
from 12.75 to 13.05 GHz	65 dB min
Coupled Port	-30 dB nominal non-directional
Overall length	135 mm
Flanges	UBR 120 (alternative flanges and coax interfaces available)

