

# A1 Microwave

Web: <http://www.A1Microwave.com>

Email: [A1sales@A1Microwave.com](mailto:A1sales@A1Microwave.com)




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

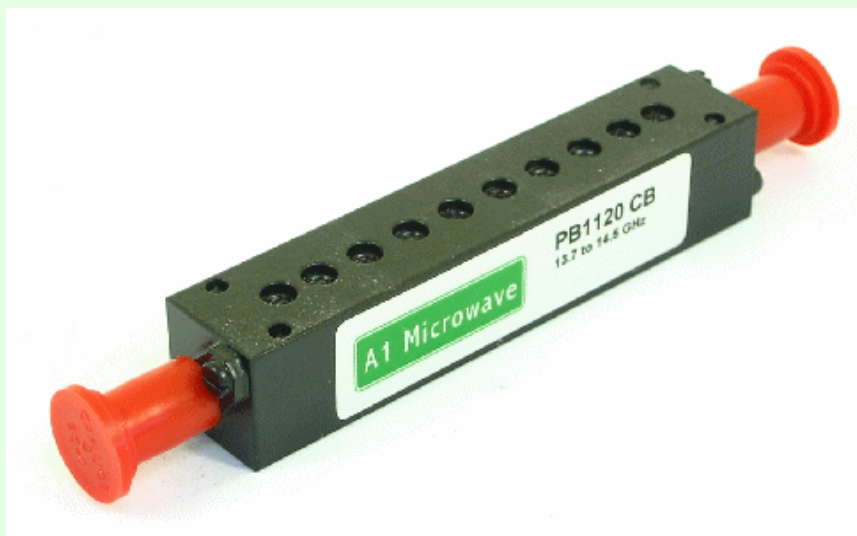

## Ordering information :- Model number **PB1120CB** Ku-band TX filter

Designed for use as an input filter in Ku band satcoms HPA's to suppress input broad band noise.

Passband	13.7 to 14.5 GHz
Passband insertion loss	1.5 dB typical
Passband return loss	18 dB typical
Passband group delay variation	1.3 ns typical
Rejection:	
from DC to 13.45 GHz	30 dB min
from 14.75 to 20 GHz	30 dB min
Overall length	71 mm max
Connectors	SMA female (alternative coax interfaces available)

