

A1 Microwave

Web: <http://www.A1Microwave.com>

Email: A1sales@A1Microwave.com




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

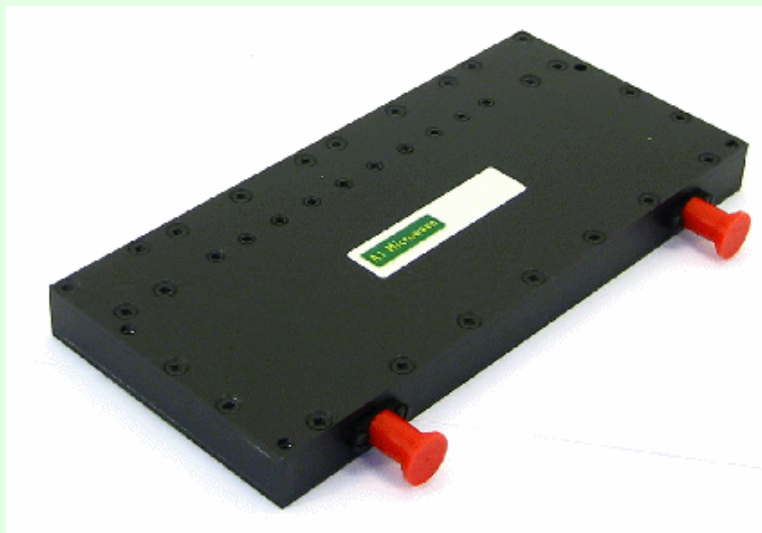

Ordering information :- Model number **PB1388CB** Satcom IF Filter

Designed for satcoms up and down converter applications for suppressing LO leakage from the mixer, adjacent channels and other broad band spurious.

Centre frequency	880 MHz
Bandwidth	46 MHz
Passband insertion loss	2 dB max
Passband return loss	20 dB min
Passband group delay variation	7 ns typical

Rejection: at 950 MHz 80 dB min

Overall dimensions 160 x 84 x 15 mm nominal

Connectors SMA female (alternative coax interfaces available)

