

A1 Microwave

Web: <http://www.A1Microwave.com>

Email: A1sales@A1Microwave.com




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

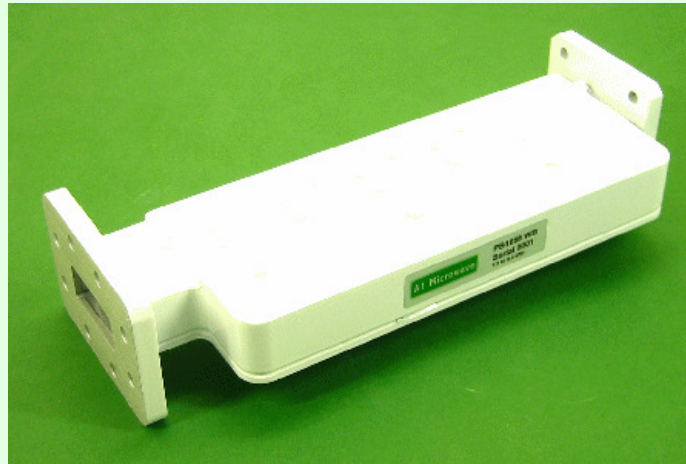

Ordering information :- Model number PB1668WB-CF/PB-W X-band Satcoms RX Reject Filter.

Designed for X band satcoms transmitter applications for suppressing Receive band signals.

Passband	7.9 to 8.4 GHz
Passband insertion loss	0.35 dB typical, 0.5 dB max
Passband group delay variation	4.2 nS typical
Passband return loss	20 dB min
Rejection :	from DC to 7.75 GHz
	90 dB min
Overall length	170 mm nominal
Flanges	CPR 112 F and PBR 84

