

A1 Microwave

Web: <http://www.A1Microwave.com>

Email: A1sales@A1Microwave.com




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

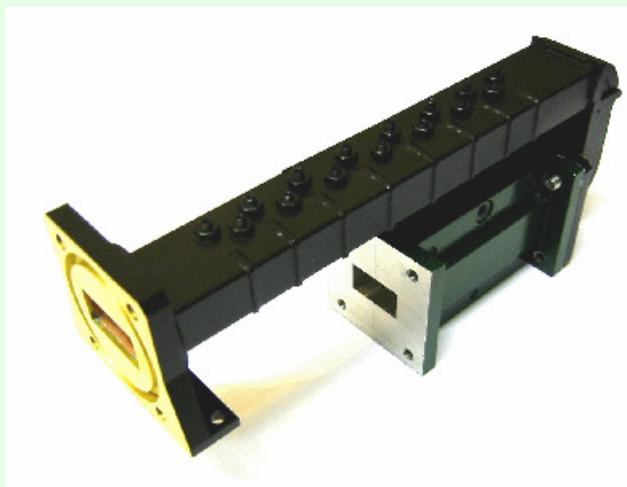

Ordering information :- Model number **PB1062WA** Ku-band Satcoms Radar and TX Reject Filter

Designed for Ku band satcoms receiver applications for suppression of radar and transmitter

Interference Passband 10.95 to 12.75 GHz

Passband insertion loss 0.4 dB max

Passband group delay variation 1 nS typical

Rejection : from DC to 9.5 GHz	90 dB min
from 9.5 to 10.45 GHz	30 dB min
from 14 to 14.5 GHz	80 dB min

Overall length 155 mm nominal

Flanges UBR 120 (alternatives available)

